


Ceiling details:

- Suggested ceiling hole dimensions = fixed part of ceiling cover: (WxL) 1968x1690mm.
- Movable ceiling cover suggested dimensions (WxL) 1519x1442.5mm.
- The cover of the ceiling hole is divided in 2 parts: a) the fixed one –blue- (fixed on the lift's body) and b) the movable one –green- (swiveling with the lift's moving part).
- In order to achieve 2.5mm gap in all perimeter the ceiling cover pitch must not exceed 12,5mm.
- The rear side of the fixed part must be trimmed (detail F).
- Any change in material dimensions will result to changes in the suggested dimensions for the ceiling covers.
- The thickness of the ceiling covers **must not** in any case exceed 20mm.



CATEGORY	FLAT PANEL CEILING LIFT WITH LINEAR MOTION AND ROTATION	DRAWING TYPE	
MODEL	FPLCV2-52-65+LM+R+LOCK (v. 2022)	DRAFT	FINAL
FEATURE	VERTICAL MOTION 960mm, DOUBLE WAY ROTATION ABILITY, MAXIMUM LOAD 45kg, SAFETY LOCKING SYSTEM IN CLOSED POSITION		X
COLOUR	BLACK RAL9005 or WHITE RAL9016	REVISION	DATE
DRAWING No	v. 2022-01-CA	APPROVED BY:	YES

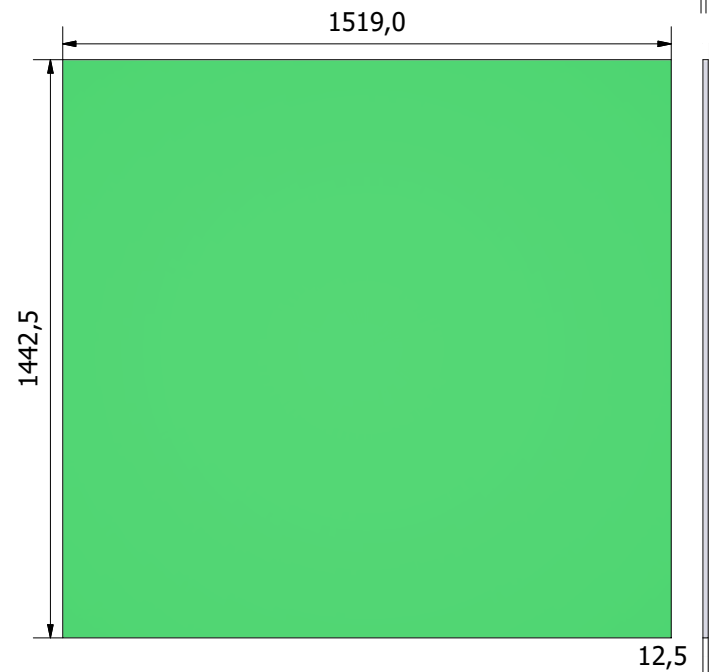